


Mini LC series [← Back](#)

Trimless W11111LED
Trim 11111LED

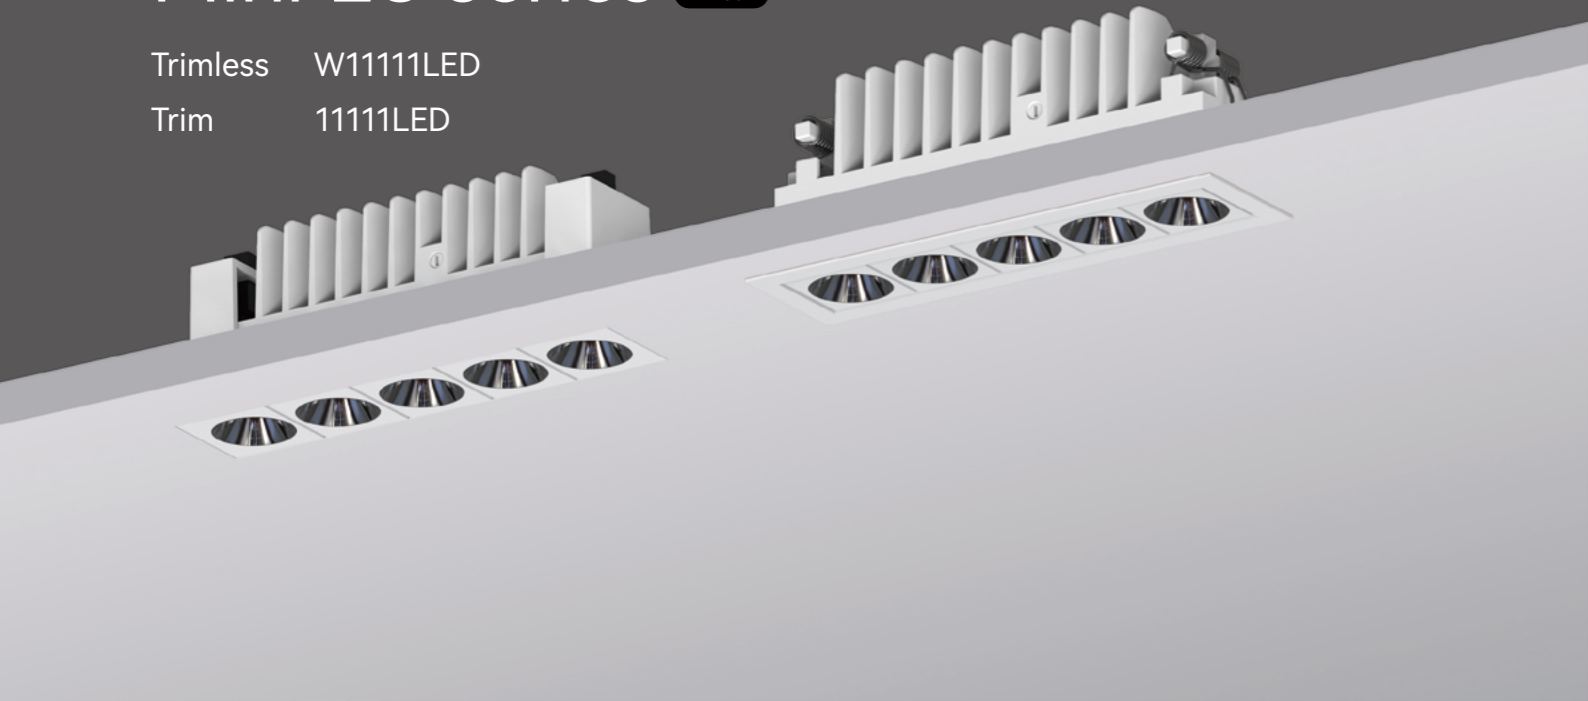

Quickinfo

GENERAL
Recessed
IP20~IP44

LED
OSRAM
12W
2700K, 3000K, 4000K, 5000K
50000h@L80
CRI ≥ 90
SDCM: 5

OPTICAL
Direct illumination
Beam angle
15° / 24° / 33° / 40° / 50° / 60° / 13° x 45°
Optical accessories

ELECTRICAL
NON-DIM
PHASE
1-10V
DALI
BLUETOOTH

PHYSICAL
Aluminum




Description

Linear spotlight with five heads modelling design can help the space to add visual dynamic sense and personalization, thus improving the quality of the whole space.

Applications

Villas, Residence buildings, Galleries, Star-rated Hotels, Shopping centers, Exhibition halls, Bars, Restaurants, Offices, etc.

Features

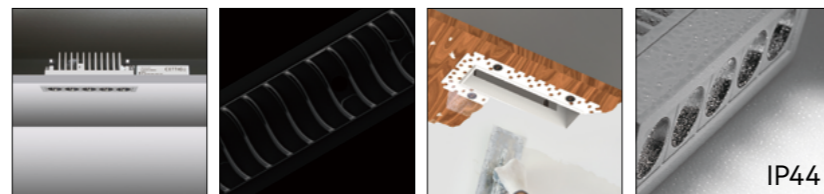

Standard configuration

COLOUR TEMPERATURE
2700K
3000K

CONTROL
NON-DIM

OPTICAL
15° / 24° / 33° / 40° / 50° / 13° x 45°

COLOUR(housing)
White

COLOUR(reflector)
Dark light

Extended configuration

COLOUR TEMPERATURE
4000K
5000K

CONTROL
DALI, PHASE, 1-10V

OPTICAL
60° (white reflector)

COLOUR(housing)
Black

COLOUR(reflector)
Specular, Black, White

Options on request


CONTROL
BLUETOOTH

Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
12W	15V	700mA	2700K	558~689 lm
			3000K	654~813 lm

Test standards:
OSRAM LED, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

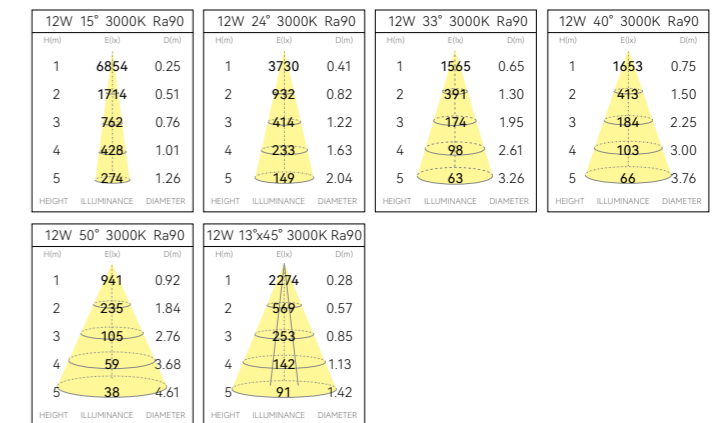

Light effect and planning aid

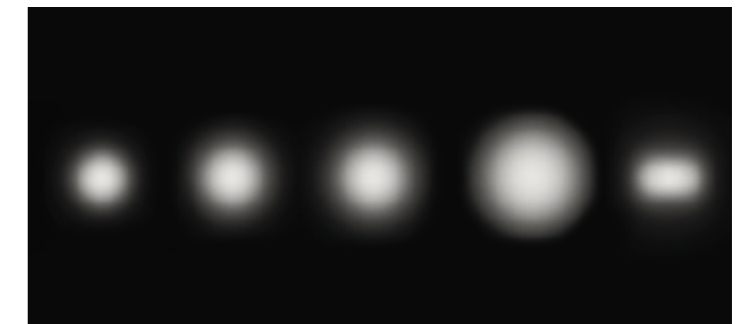

Emphasis of objects or architectural elements. Wide-beam illumination of larger objects or spatial zones.

Mounting dimension

