


# Mini LC series [← Back](#)

Trimless W12111LED

Trim 12111LED

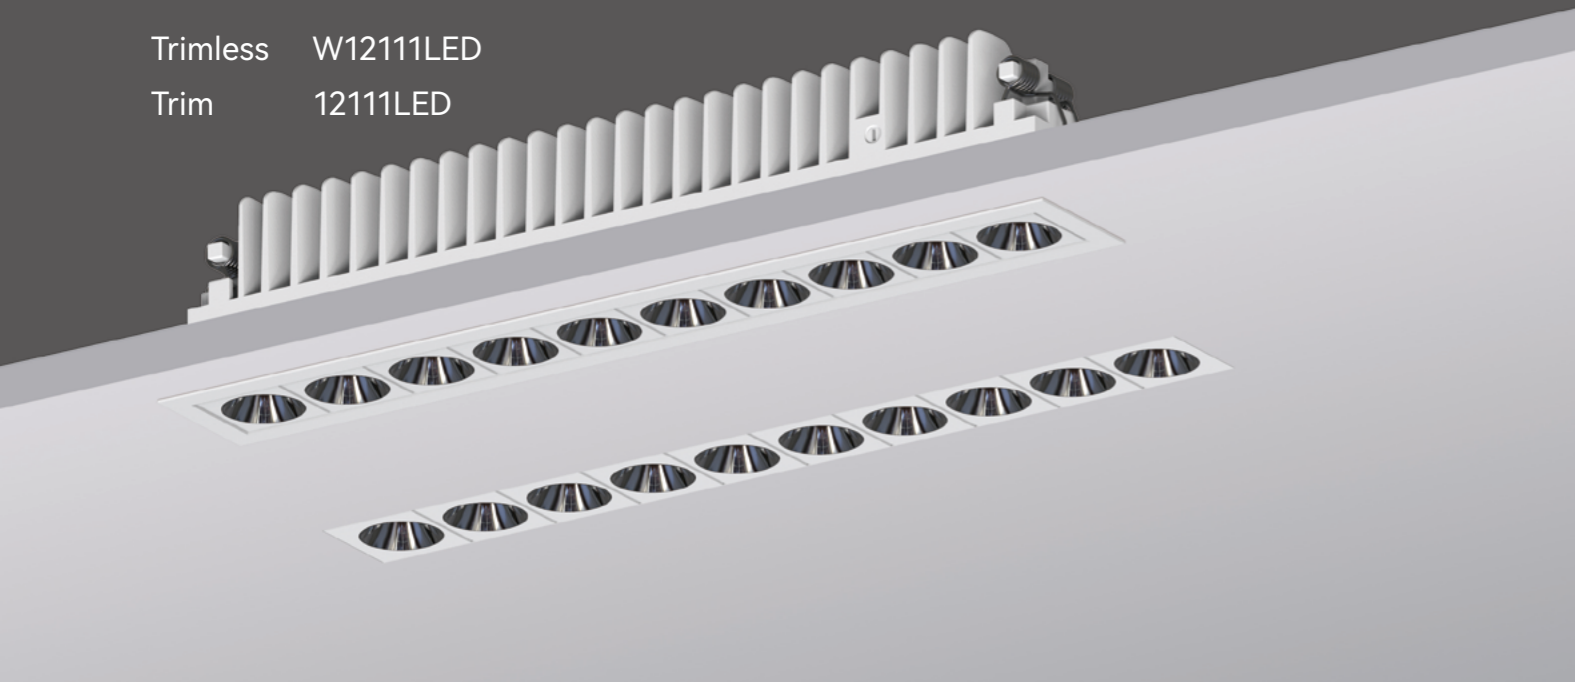

## Quickinfo

### GENERAL

Recessed  
IP20~IP44

### LED

**OSRAM**  
24W  
2700K, 3000K, 4000K, 5000K  
50000h@L80  
CRI ≥ 90  
SDCM: 5

### OPTICAL

Direct illumination  
Beam angle  
15° / 24° / 33° / 40° / 50° / 60° / 13° x 45°  
Optical accessories

### ELECTRICAL

NON-DIM  
PHASE  
1-10V  
DALI  
BLUETOOTH

### PHYSICAL

Aluminum




## Description

Linear spotlight with ten heads modelling design can help to increase the visual guidance and enhance the extension of space.

## Applications

Villas, Residence buildings, Galleries, Star-rated Hotels, Shopping centers, Exhibition halls, Bars, Restaurants, Offices, etc.

## Features

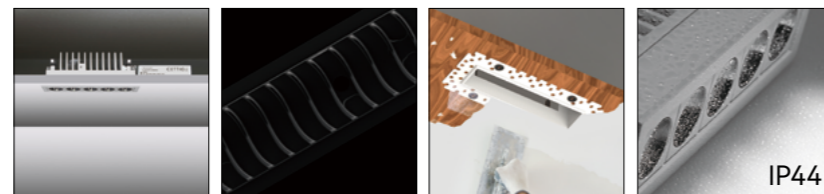

## Standard configuration

### COLOUR TEMPERATURE

2700K  
3000K

### CONTROL

NON-DIM

### OPTICAL

15° / 24° / 33° / 40° / 50° / 13° x 45°

### COLOUR(housing)

White

### COLOUR(reflector)

Dark light

## Extended configuration

### COLOUR TEMPERATURE

4000K  
5000K

### CONTROL

DALI, PHASE, 1-10V

### OPTICAL

60° (white reflector)

### COLOUR(housing)

Black

### COLOUR(reflector)

Specular, Black, White

## Options on request

### CONTROL


BLUETOOTH

## Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
24W	30V	700mA	2700K 3000K	1101~1410 lm 1332~1677 lm

Test standards:  
OSRAM LED, CRI 90, tolerance range of electrical and optical parameters: ±10%.

## Light Distribution

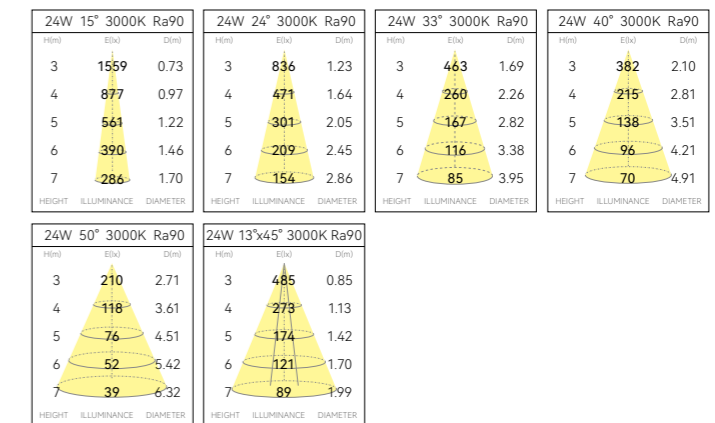

## Light effect and planning aid

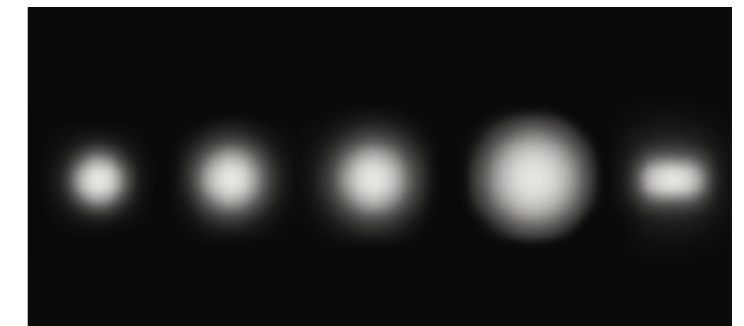

Emphasis of objects or architectural elements. Wide-beam illumination of larger objects or spatial zones.

## Mounting dimension

