

Mini Spotlight

← Back

1392LED



Quickinfo

GENERAL

Recessed
IP20~IP44

LED

NICHIA
3W
2700K, 3000K, 4000K, 5000K
50000h@L80
CRI ≥ 90
SDCM: 5

OPTICAL

Direct illumination
Beam angle 24° / 30° / 36° / 42° / 60°
Optical accessories

ELECTRICAL

NON-DIM,
PHASE,
1-10V,
DALI,
BLUETOOTH

PHYSICAL

Aluminum



Description

Universal adjustable design can help you achieve close focus projection. White, specular chrome, dark chrome design can better combine with different materials.

Applications

Showrooms, Galleries, Restaurants, Museum, Hotels, Bars, Shopping centers and retail stores, etc.

Features



Standard configuration

COLOUR TEMPERATURE

2700K
3000K

CONTROL

NON-DIM

OPTICAL

24° / 30° / 36° / 42° / 60°

COLOUR(housing)

White, specular chrome,
dark chrome

COLOUR(reflector)

White, specular chrome,
dark chrome

Extended configuration

COLOUR TEMPERATURE

4000K
5000K

CONTROL

DALI, PHASE, 1-10V

Options on request

CONTROL


BLUETOOTH

Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
3W	3V	700mA	2700K	119~163 lm
			3000K	122~164 lm

Test standards:
Nichia LED, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

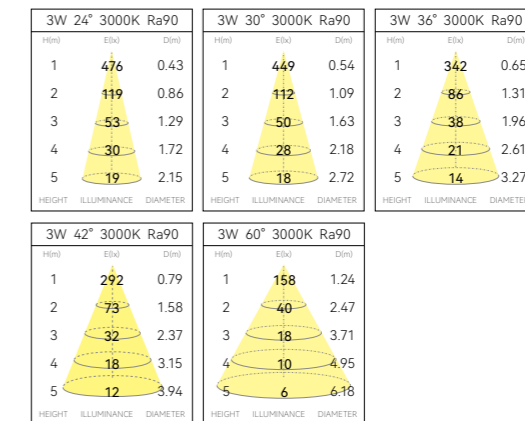

Light effect and planning aid

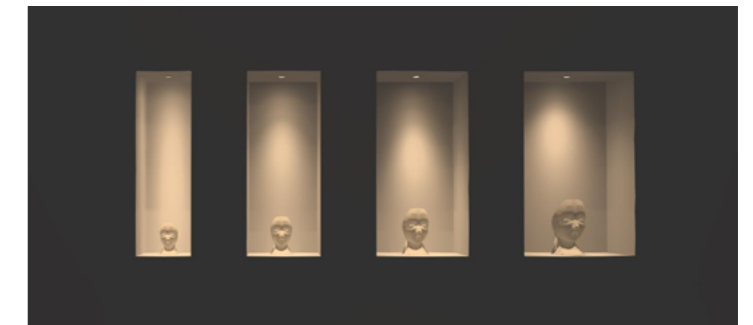

Emphasis of objects or architectural elements.

Mounting dimension

