


Mini LC series [← Back](#)

Trimless W1711LED
Trim 1711LED

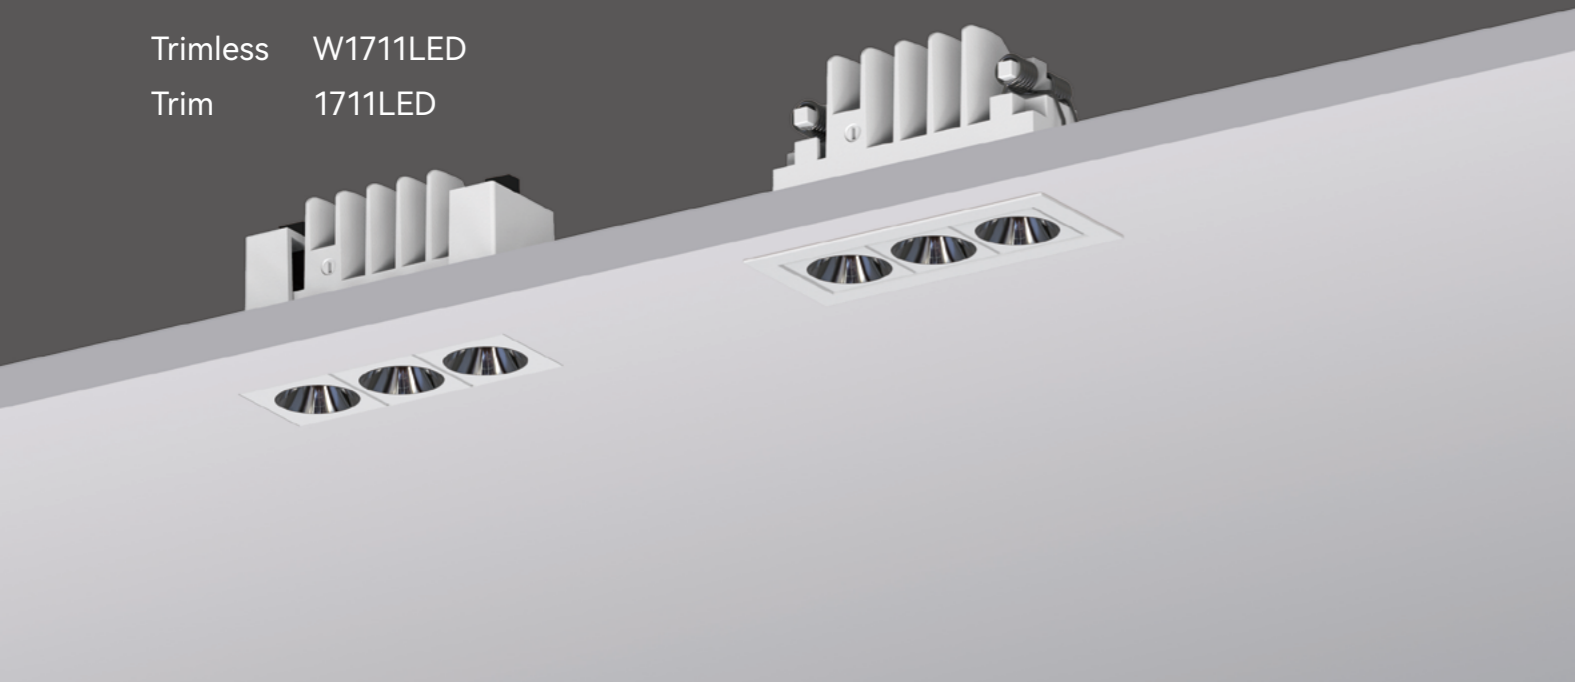

Quickinfo

GENERAL
Recessed
IP20~IP44

LED
OSRAM
7W
2700K, 3000K, 4000K, 5000K
50000h@L80
CRI ≥ 90
SDCM: 5

OPTICAL
Direct illumination
Beam angle
15° / 24° / 33° / 40° / 50° / 60° / 13° x 45°
Optical accessories

ELECTRICAL
NON-DIM
PHASE
1-10V
DALI
BLUETOOTH

PHYSICAL
Aluminum




Description

Linear spotlight with three heads modelling design, small size and good concealment can better integrate into the space.

Applications

Villas, Residence buildings, Galleries, Star-rated Hotels, Shopping centers, Exhibition halls, Bars, Restaurants, Offices, etc.

Features

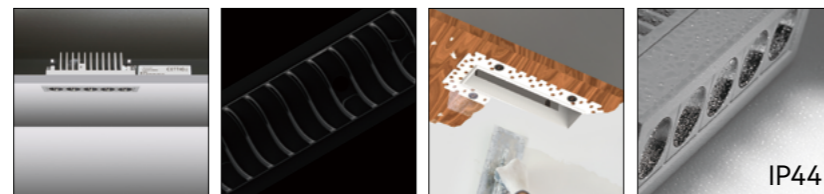

Standard configuration

COLOUR TEMPERATURE
2700K
3000K

CONTROL
NON-DIM

OPTICAL
15° / 24° / 33° / 40° / 50° / 13° x 45°

COLOUR(housing)
White

COLOUR(reflector)
Dark light

Extended configuration

COLOUR TEMPERATURE
4000K
5000K

CONTROL
DALI, PHASE, 1-10V

OPTICAL
60° (white reflector)

COLOUR(housing)
Black

COLOUR(reflector)
Specular, Black, White

Options on request


CONTROL
BLUETOOTH

Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
7W	9V	700mA	2700K 3000K	312~446 lm 391~485 lm

Test standards:
OSRAM LED, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

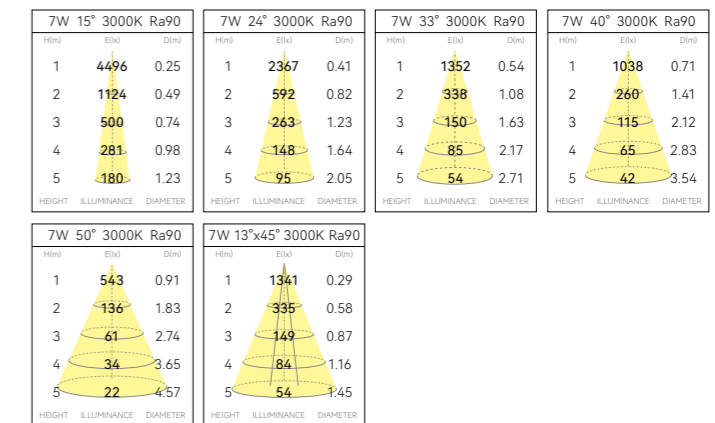

Light effect and planning aid

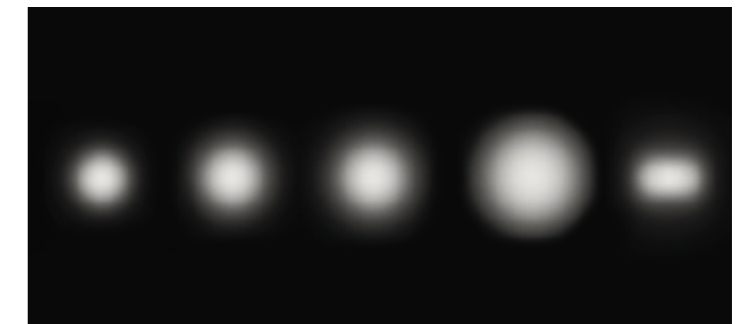

Emphasis of objects or architectural elements. Wide-beam illumination of larger objects or spatial zones.

Mounting dimension

