

Focus series

← Back

2703LED



Quickinfo

GENERAL
Recessed
IP20

LED
CITIZEN
15W, 20W
2700K, 3000K, 4000K, 5000K
50000h@L80
CRI ≥ 90
SDCM: 3

OPTICAL
Direct illumination
Beam angle 15° /24° /38°
Optical accessories

ELECTRICAL
NON-DIM
PHASE
1-10V
DALI
BLUETOOTH

PHYSICAL
Aluminum




Description

Stretchable design, thick and solid appearance, can provide high power lighting.

Applications

Shopping malls, Museums, Galleries, Exhibition halls, Hotels, Restaurants, Bars, Convention centers, etc.

Features

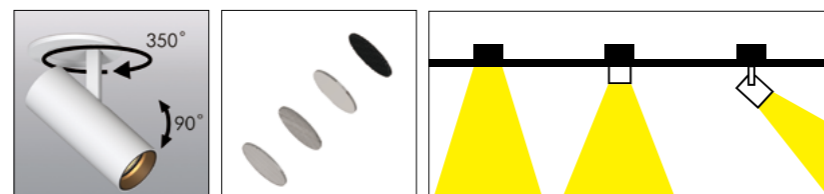

Standard configuration

COLOUR TEMPERATURE
2700K
3000K

CONTROL
NON-DIM

OPTICAL
15° /24° /38°

COLOUR(housing)
White

COLOUR(reflector)
Black

Extended configuration

COLOUR TEMPERATURE
4000K
5000K

CONTROL
DALI, PHASE, 1-10V

COLOUR(housing)
Black

Options on request

CONTROL
BLUETOOTH

Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
15W	36V	350mA	2700K	945~1064 lm
			3000K	1072~1122 lm
20W	36V	500mA	2700K	1303~1468 lm
			3000K	1500~1570 lm

Test standards:
Citizen COB, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

20W 15° 3000K Ra90			20W 24° 3000K Ra90			20W 38° 3000K Ra90		
H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
3	1609	0.84	3	809	1.27	3	415	1.98
4	905	1.12	4	455	1.69	4	233	2.64
5	579	1.41	5	291	2.11	5	149	3.30
6	402	1.69	6	202	2.53	6	104	3.97
7	296	1.97	7	149	2.95	7	76	4.63

Light effect and planning aid

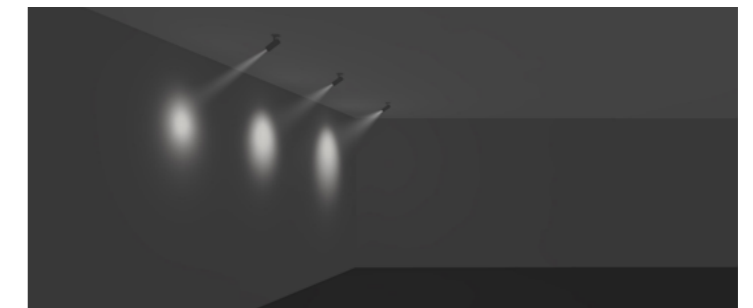

Emphasis of objects or architectural elements.

Technical drawing

