

Mini LC series

← Back

Surface mounted 81352LED
Pendant 51352LED



Quickinfo

GENERAL
Surface mounted
IP20

LED
OSRAM
12W
2700K, 3000K, 4000K, 5000K
50000h@L80
CRI ≥ 90
SDCM: 5

OPTICAL
Direct illumination
Beam angle
15° / 24° / 33° / 40° / 50° / 60° / 13° x 45°
Optical accessories

ELECTRICAL
NON-DIM
PHASE
1-10V
DALI

PHYSICAL
Aluminum



Description

Elegant surface-mounted luminaire with five heads shape and linear contour. Innovative linear lighting technology provides illumination for general lighting and standard-compliant, no glare places.

Applications

Villas, Residence buildings, Galleries, Star-rated Hotels, Shopping centers, Exhibition halls, Bars, Restaurants, Offices, etc.

Features



Standard configuration

COLOUR TEMPERATURE
2700K
3000K

CONTROL
NON-DIM

OPTICAL
15° / 24° / 33° / 40° / 50° / 13° x 45°

COLOUR(housing)
White

COLOUR(reflector)
Dark light

Extended configuration

COLOUR TEMPERATURE
4000K
5000K

CONTROL
DALI, PHASE, 1-10V

OPTICAL
60° (white reflector)

COLOUR(housing)
Black


COLOUR(reflector)
Specular, Black, White

Parameters


POWER	VF	CURRENT	CCT	LUMINOUS FLUX
12W	15V	700mA	2700K 3000K	558~689 lm 654~813 lm

Test standards:
OSRAM LED, CRI 90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution

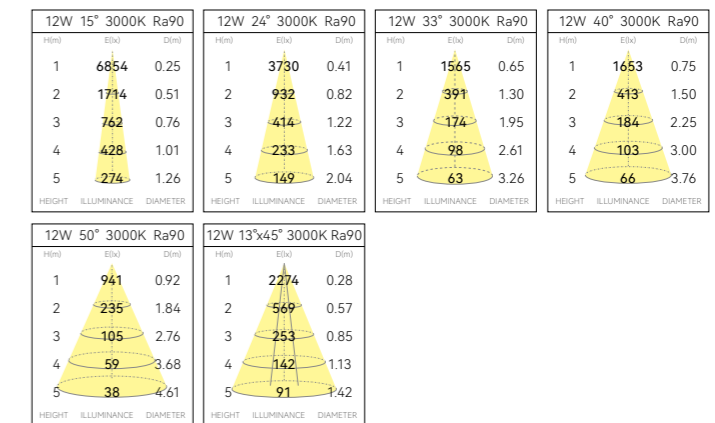

Light effect and planning aid

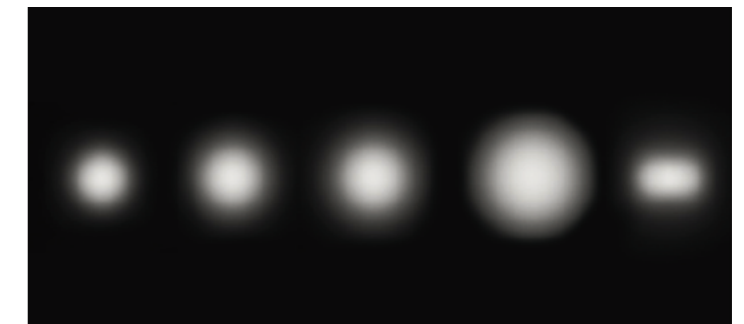

Emphasis of objects or architectural elements. Wide-beam illumination of larger objects or spatial zones.

Mounting dimension

