


# VUELITE | MINI-SIDE

SILICONE LED FLEX | INTERIOR, EXTERIOR & UNDERWATER APPLICATIONS

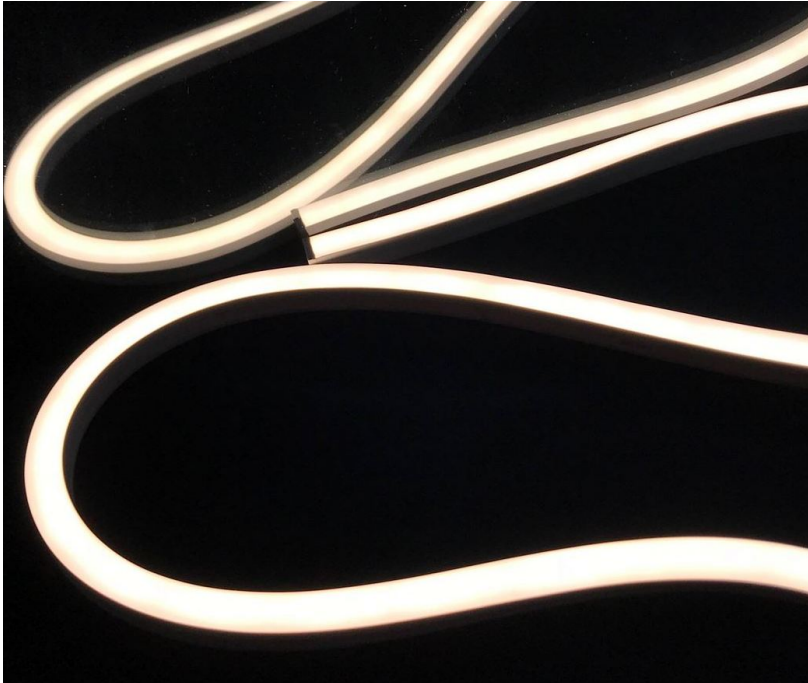

## FEATURES

- IP67
- Even light distributions (Dot-Free)
- Continuous Flexible lighting
- Customise Lengths (made to order)
- Silicone Housing
- Beam angle 110°
- Operating Temp -40°C to + 65°C

### Applications


- Interior & Exterior installation




### Colour Temperature Options

- 2700K, 3000K, 4000K  
(Other CCT available upon request)

### Colour Rendering Index

- CRI: >80



<b>IP67</b>	<b>IK08</b>	 UV RESISTANT	 FLAME RESISTANT	 SALTWATER RESISTANT
-------------	-------------	--	---	---

## Technical Information

Type	IP Rating	Luminous Flux** (3000K)	Bending Ø(mm)	Cutting Increment	Continuous Run
MINI-SIDE	IP67	5W @ 280lmm 10W @ 550lmm	> Ø 60mm	50mm (White)	Max 6 mt (Single Feed) Max 12 mt (Double Feed)

\*\* Measure of the useful power emitted by a light source (amount of light produced out of the fixture).

## Ordering

MINI-SIDE	-	67	-	10	-	27K	-	BTM	-	ND
Fitting		IP Rating		Output (watt)		Colour Temp		Cable Option		Dimming
MINI-SIDE		67		5 (watt) 10 (watt)		27K (2700K) 3K (3000K) 4K (4000K)		END (End Feed)		ND (Non-dim) DIM (1-10V) DALI DMX Casambi

Specifications and Dimensions subject to change without notice  
Consult your representative for additional options and finishes

# VUELITE | MINI

SILICONE LED FLEX | INTERIOR, EXTERIOR & UNDERWATER APPLICATIONS



## Profile & Mounting

<p>TRU-C (Al. Clips) (50mm) TRU (AL. Extrusion) (1000mm)</p>	<p>TOP - Vertical Bend</p>

## Cable Options

<p>END (End Feed)</p>		