



SILICONE NEON FLEX

2020 | PRODUCT UPDATE

VUELITE NEON FLEX

- Vertical Top Bend / Horizontal Side Bend / 3D bending
- Silicone housing
- High flame retardant with no harmful smoke in burning
- Suitable for marine, chlorine and Saline environment
- Operating Temperature -40°C to 65°C
- Special Request – steam room and dry sauna applications.
- Double insulated cable (no PVC material)
- IP67 for Interior, Wet areas & Exterior Application
- IP68 for underwater permanent submersion up to 1mt
- 5 year warranty



PIXEL



RGBW



WHITE



NEON FLEX

VERTICAL TOP BEND



MINI
(10X10mm)

- IP67 | IK08
- 2700K, 3000K, 4000K
- Bending Ø 60mm
- 600lm (10W) per meter
- 50mm Cutting increment
- Continuous runs up to 10mt (single feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Lower wattage available




NEON-MIN
(14X10mmH)

- IP67 | IK08
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 60mm
- 800lm (10W) per meter
- 50mm Cutting increment
- 71.5mm (RGBW) increment
- Continuous runs up to 10mt (single feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Lower wattage available

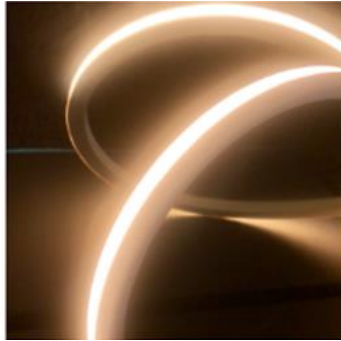

NEON-110
(16X17mmH)
Single Side Illumination

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 100mm
- 1100lm (15W) per meter
- 50mm (White) increment
- 71.5mm (RGBW) increment
- Continuous runs up to 20mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)
- [Steam Room, Dry Sauna & Spa Application \(max 8watt\)](#)



NEON-280
(16X14mmH)
3 Side Illumination

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 100mm
- 1100lm (15W) per meter
- 50mm (White) increment
- 71.5mm (RGBW) increment
- Continuous runs up to 20mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)
- [Steam Room, Dry Sauna & Spa Application \(max 8watt\)](#)



NEON-MAXI-110
(24X12mmH)
Single Side Illumination

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 120mm
- 2000lm (24W) per meter
- 100mm (White) increment
- 71.5mm (RGBW) increment
- Continuous runs up to 10mt (single feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)



NEON-MAXI-280
(24X12mmH)
3 Side Illumination

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 120mm
- 2000lm (24W) per meter
- 100mm (White) increment
- 71.5mm (RGBW) increment
- Continuous runs up to 10mt (single feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)

NEON FLEX

HORIZONTAL SIDE BEND



NEON-SIDE
(16X17mmH)

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 60mm
- 800lm (15W) per meter
- 50mm (White) increment
- 83.3mm (RGBW) increment
- Continuous runs up to 20mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)
- [Steam Room, Dry Sauna & Spa Application \(max 8watt\)](#)




SUPER NEON-MINI
(8X12mmH)

- IP67 | IK08
- 2700K, 3000K, 4000K
- Bending Ø 60mm
- 400lm (12W) per meter
- 50mm (White) increment
- Continuous runs up to 10mt (single feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)

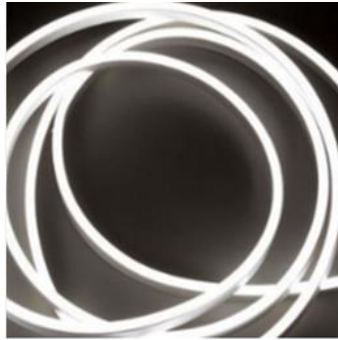


SUPER NEON
(11X20mmH)

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 60mm
- 600lm (15W) per meter
- 50mm (White) increment
- 83.3mm (RGBW) increment
- Continuous runs up to 20mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)

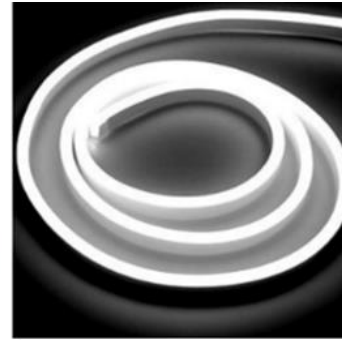


SUPER NEON-TOP
(13X22mmH)

- IP67 | IK10
- IP68 (submersion up to 1mt)
- 2700K, 3000K, 4000K, RGBW
- Bending Ø 60mm
- 600lm (15W) per meter
- 50mm (White) increment
- 83.3mm (RGBW) increment
- Continuous runs up to 20mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Special Request

- Tuneable White/ Amber
- Pixel (Programable Patterns)

3 DIMENSIONAL BENDING

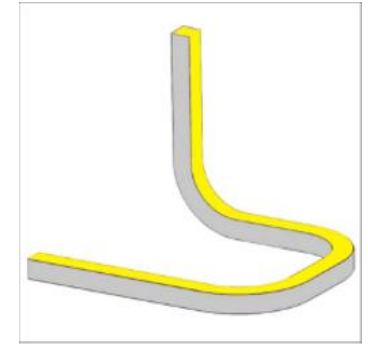

NEON-TWIST
(16x17mmH)

- IP67
- 2700K, 3000K, 4000K
- Bending Ø 100mm – 3D
- 800lm (15W) per meter
- 50mm (White) increment
- Continuous runs up to 15mt (double feed)
- Dimming: Phase Dim, 1-10V, DALI, DMX

NEON FLEX

PIXEL – PROGRAMABLE PATTERNS



PIXEL NEON-110
PIXEL NEON-SIDE
(16X17mmH)

- IP67 | IK10
- PIXEL – Programable 83.3mm section
- RGBW - 16W per meter
- Bending Ø 100mm
- Continuous runs up to 10mt
- 83.3mm increment (DMX)



PIXEL NEON-MAXI
(24X12mm)

- IP67 | IK10
- PIXEL – Programable 83.3mm section
- RGBW - 16W per meter
- Bending Ø 120mm
- Continuous runs up to 10mt
- 83.3mm increment (DMX)

LINEAR – SURFACE /PENDANT MOUNT



LINE-25 (25X22mmH)

Mounting Options

- Magnetic
- Surface
- Surface Adjustable
- Suspended

Features

- 2700K, 3000K, 4000K, RGBW
- 1100lm (15W) per meter
- 305-3005mm single length (100mm increment)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Colour

- Black, White, Natural Anodise

Special Request

- Tuneable White/ Amber



LINE-32 (32X22mmH)

Mounting Options

- Magnetic
- Surface
- Surface Adjustable
- Suspended

Features

- 2700K, 3000K, 4000K, RGBW
- 2000lm (24W) per meter
- 305-3005mm single length (100mm increment)
- Dimming: Phase Dim, 1-10V, DALI, DMX

Colour

- Black, White, Natural Anodise

Special Request

- Tuneable White/ Amber

APPLICATIONS

