

Lanova 230

SX 975 20-9



pole top luminaire, asymmetric street
LED , 3300 lm, 4500 K, CRI: > 70, electronic converter,
Total power: 40 W



pole top luminaire for spigot \varnothing 76mm, luminaire
housing made of die-cast aluminium, powder-coated,
diffuser shape made of PMMA, partly satinised
Optical system: reflector optics
incl. 7m feed cable,

CE, IP65, Protection Class II

colour: Selux Graphite or special finish

Height h: 720 mm
Diameter: 230 mm
Weight: 11 kg
wind pressure: 0.175 m2

Make: Selux, Type: SX 975 20-9

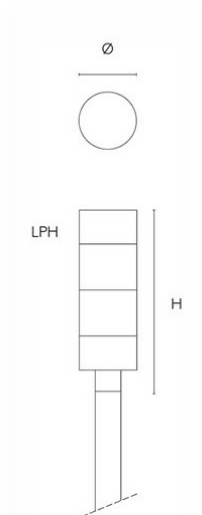

Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Lanova 230

SX 975 20-9

Technics

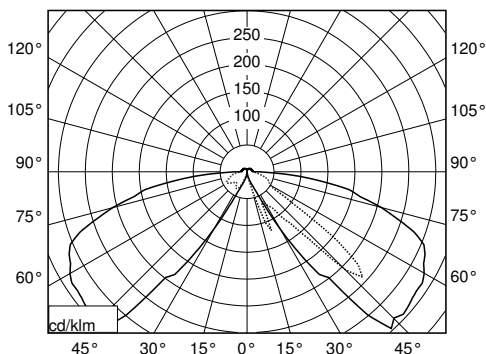

Photometric data: 7628_4500
Upward light ratio (ULR): 5.8 %

Lamp

LED, 3300 lm, 4500 K, CRI: > 70

Optic

reflector optics, asymm. street

Electrics

electronic converter
Total power: 40 W

incl. 7m feed cable
control options:
dynamic, DALI, HNS

Luminous flux characteristics / Operating time

	20000	40000	60000	80000
Operating time				
Lumen maintenance	94%	89%	84%	80%
LLMF*	0.94	0.89	0.84	0.8

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com