


# VUELITE | THETA-LG

LED LINEAR EXTRUSION | IP20, IP44, IP65



## THETA-LG | RECESS MOUNT

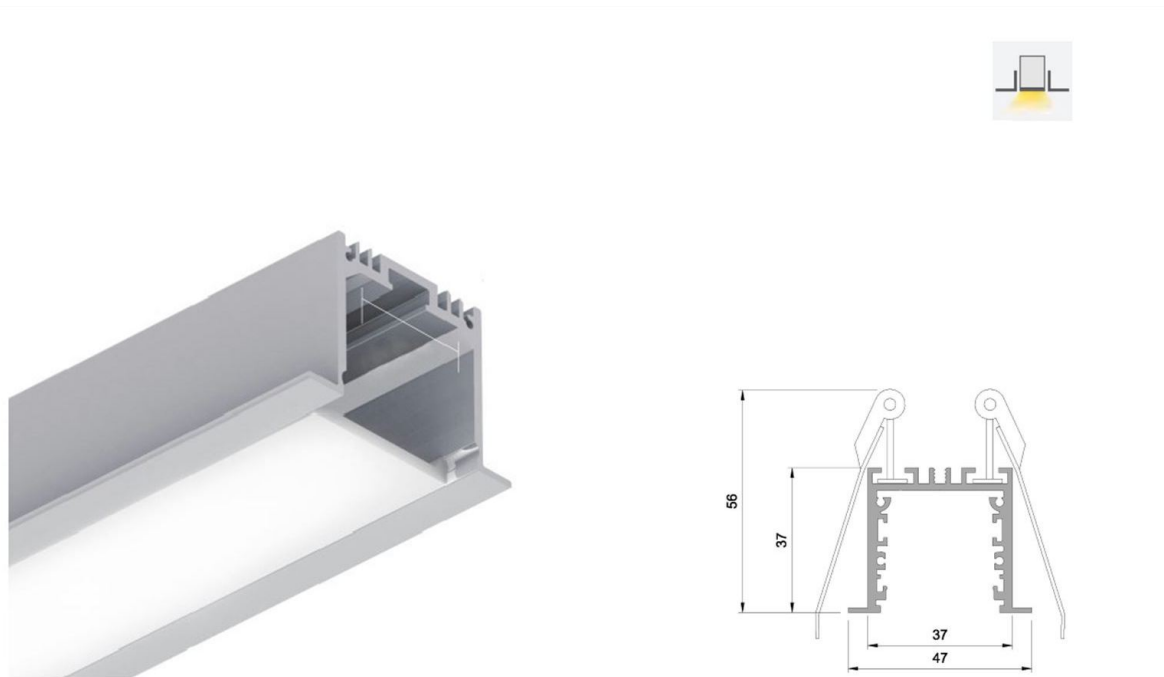

### FEATURES

- Flexible LED strip within aluminium extrusion
- 120° viewing angle
- Dot-Free
- **IP20, IP44, IP65**

### Colour Temperature Options

- 2700K - V Warm White
- 3000K - Warm White
- 4000K - Neutral White
- RGBW - Red, Green, Blue, White-2700K
- TW - Tunable White (2200K-6500K)

### Installation

- Recess Mount

### Colour Rendering Index

- 90CRI \*\*standard
- 80CRI available upon request

### Cutting Increments

- 33.33mm (White)
- 71.5mm (RGBW)

Specifications and Dimensions subject to change without notice

Consult your representative for additional options and finishes

# VUELITE

## LED LINEAR EXTRUSION



### TECHNICAL INFORMATION

LED QTY (chip /Mt)	WATTAGE	CRI**	COLOUR TEMP	OUTPUT / MT (Initial lumens)	ALPHA**	BETA**	DELTA**	DELTA-LG**	EPSILON**	OMEGA**	OMICRON**	THETA**	THETA-LG**
210	6 watts	CRI 90+	2700K	750 lm	420 lm	420 lm	503 lm	503 lm	308 lm	585 lm	563 lm	420 lm	420 lm
210	6 watts	CRI 90+	3000K	810 lm	454 lm	454 lm	543 lm	543 lm	332 lm	632 lm	608 lm	454 lm	454 lm
210	6 watts	CRI 90+	4000K	840 lm	470 lm	470 lm	563 lm	563 lm	344 lm	655 lm	630 lm	470 lm	470 lm
210	9 watts	CRI 90+	2700K	1125 lm	630 lm	630 lm	754 lm	754 lm	461 lm	878 lm	844 lm	630 lm	630 lm
210	9 watts	CRI 90+	3000K	1215 lm	680 lm	680 lm	814 lm	814 lm	498 lm	948 lm	911 lm	680 lm	680 lm
210	9 watts	CRI 90+	4000K	1260 lm	706 lm	706 lm	844 lm	844 lm	517 lm	983 lm	945 lm	706 lm	706 lm
210	12 watts	CRI 90+	2700K	1500 lm	840 lm	840 lm	1005 lm	1005 lm	N/A	1170 lm	1125 lm	840 lm	840 lm
210	12 watts	CRI 90+	3000K	1620 lm	907 lm	907 lm	1085 lm	1085 lm	N/A	1264 lm	1215 lm	907 lm	907 lm
210	12 watts	CRI 90+	4000K	1680 lm	941 lm	941 lm	1126 lm	1126 lm	N/A	1310 lm	1260 lm	941 lm	941 lm
210	15 watts	CRI 90+	2700K	1875 lm	1050 lm	1050 lm	1256 lm	1256 lm	N/A	1463 lm	1406 lm	1050 lm	1050 lm
210	15 watts	CRI 90+	3000K	2025 lm	1134 lm	1134 lm	1357 lm	1357 lm	N/A	1580 lm	1519 lm	1134 lm	1134 lm
210	15 watts	CRI 90+	4000K	2100 lm	1176 lm	1176 lm	1407 lm	1407 lm	N/A	1638 lm	1575 lm	1176 lm	1176 lm
210	18 watts	CRI 90+	2700K	2250 lm	1260 lm	1260 lm	1508 lm	1508 lm	N/A	1755 lm	1688 lm	1260 lm	1260 lm
210	18 watts	CRI 90+	3000K	2430 lm	1361 lm	1361 lm	1628 lm	1628 lm	N/A	1895 lm	1823 lm	1361 lm	1361 lm
210	18 watts	CRI 90+	4000K	2520 lm	1411 lm	1411 lm	1688 lm	1688 lm	N/A	1966 lm	1890 lm	1411 lm	1411 lm
210	21 watts	CRI 90+	2700K	2625 lm	1470 lm	1470 lm	1759 lm	1759 lm	N/A	2048 lm	1969 lm	1470 lm	1470 lm
210	21 watts	CRI 90+	3000K	2835 lm	1588 lm	1588 lm	1899 lm	1899 lm	N/A	2211 lm	2126 lm	1588 lm	1588 lm
210	21 watts	CRI 90+	4000K	2940 lm	1646 lm	1646 lm	1970 lm	1970 lm	N/A	2293 lm	2205 lm	1646 lm	1646 lm
84	20 watts	CRI 90+	RGBW	N/A	RGBW	RGBW	RGBW	RGBW	N/A	RGBW	RGBW	N/A	RGBW
210	12 watts	CRI 90+	TW 2200K - 6500K		✓	✓	✓	✓	N/A	✓	✓	✓	✓
210	18 watts	CRI 90+	TW 2200K - 6500K		✓	✓	✓	✓	N/A	✓	✓	✓	✓
<b>TW - TUNABLE WHITE 2200K-6500K</b>													

Specifications and Dimensions subject to change without notice

Consult your representative for additional options and finishes

# VUELITE

LED LINEAR EXTRUSION



## ORDERING INFORMATION

(Refer to Technical information for Ordering Details)



FITTING TYPE		IP RATING		OUTPUT		COLOUR TEMPERATURE		FINISH		DIMMING	
<b>THETA-LG</b>	Theta Large	-	IP20	<b>6</b>	6 watts	<b>27K</b>	2700K V Warm White	-	Aluminium	-	Non -Dim
		<b>IP44</b>	IP44	<b>9</b>	9 watts	<b>3K</b>	3000K Warm White	<b>WH</b>	White	<b>PC</b>	Phase Cut Dim
		<b>IP65</b>	IP65	<b>12</b>	12 watts	<b>4K</b>	4000K Neutral White	<b>BK</b>	Black	<b>DIM</b>	1-10V Dim
				<b>15H</b>	15 watts	<b>TW</b>	2200K-6500K			<b>DALI</b>	DALI
				<b>18</b>	18 watts	<b>RGBW</b>	RGBW (W=2700K)			<b>DMX</b>	DMX
				<b>21</b>	21 watts					<b>CAS</b>	Casambi
				<b>20</b>	20 watts (RGBW)						

Specifications and Dimensions subject to change without notice

Consult your representative for additional options and finishes